



2835B Pan American Fwy NE
Albuquerque, New Mexico 87107
Tel: (505) 842-8007
Fax: (505) 842-0366
www.ferrodevices.com
radiant@ferrodevices.com



Multiferroic II Performance Summary

Radiant's Multiferroic II Test System is the most advanced test system on the market. The Multiferroic's unique frequency rating is 270KHz @ +/-100V, 100KHz @ 200V and 5KHz @ 500V using a built-in internal amplifier. The Multiferroic II is expandable to 4kV and 10kV. The Multiferroic II is ideal for magnetolectric testing.


- » 18-bit resolution at 2MHz single pass capture rate
- » 10MHz -16-bit Stimulus interlace
- » Hysteresis accuracy 0.5%
- » Maximum data points 30,000
- » Maximum pulse width 1s and Minimum pulse width 0.5µs
- » Executes hysteresis loops to 270kHz up to +/-100V
- » Fatigues using an internal waveform generator at 2.5MHz
- » 1pA* current resolution measuring DC leakage
- » Measures 200fC of charge in a single 1 second pass considering all noise sources combined!
- » All test can be obtained without any configuration change. Radiant's test systems are offered in a single self-contained enclosure.
- » Vision Data Acquisition & Management Software is provided with Radiant Test Systems. Optional packages for Mangetoelectric thin and bulk film testing, Pyroelectric, Piezoelectric, e31 and Transistor Testing

Additional Multiferroic II Specifications include

- » 50 points/5µs data capture rate
- » Hysteresis Frequency 0.033Hz-270kHz
- » 30000 points Max Data Points
- » Minimum Pulse Widths 500ns
- » 2 COMM channels + I²C
- » 2 external 18-bit, ±10V SENSOR voltage inputs

Vision Software Operating System

Vision can construct complex programs with any number of tests to characterize all aspects of the sample in one execution while keeping track of the measurement results and the history of the sample being tested. Each Radiant tester is an extension of Vision and can execute any of the measurement tasks in the Vision Library. The type of tester determines the range of voltages, frequencies, and sample sizes that Vision may characterize with that tester. Only with a Radiant Precision tester can the researcher produce the plot below, executed in one hour on a Multiferroic II. The data shows the relationship in a single sample between the remanent polarization state and the values of its small signal capacitance and leakage.

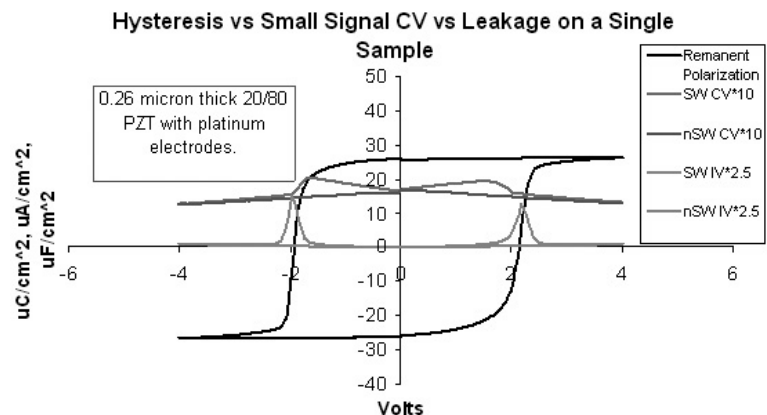



The Vision Task Library Includes:

- » Hysteresis, Leakage, Charge, Retain, Resist, Fatigue, IV, CV, PUND, Imprint, Leakage Current and Many More Options
- » Link multiple tasks to create a custom program
- » Networking features allow researcher to share data from anywhere in the world
- » Continuously variable pulse widths and hysteresis periods

Dimensions:

- » Width-17" x Depth-13" x Height-4"
- » Weight 20lbs

Hardware Specifications

TESTER PARAMETER	Multiferroic II
Voltage Range (built-in amplifiers)	±10V (Built-in internal amplifier options +/- 100V, 200V, 500V)
Voltage Range (with and HVI and external amp)	±10KV
Number of ADC Bits	18
Minimum Charge Resolution	0.8fC
Minimum Area Resolution (assuming 1 ADC bit = 1μC/cm2)	0.08μ2*
Maximum Charge Resolution	5.26mC
Maximum Area Resolution (assuming saturation polarization = 100μC/cm2)	52.6cm ²
Max Charge Resolution w/HVI	526mC
Maximum Area Resolution (assuming saturation polarization = 100μC/cm2)	>100cm ²
Maximum Hysteresis Frequency	270KHz
Hysteresis Frequency	0.033Hz – 270kHz
Minimum Pulse Width	0.5μs
Minimum Pulse Rise Time (5V)	400ns
Maximum Pulse Width	1s
Minimum Delay between Pulses	40ks
Internal Clock	25ns
Minimum Leakage Current*	2pA - +/-3.5% accuracy 1pA - +/-15% accuracy
Maximum Small Signal Cap Freq.	1MHz
Minimum Small Signal Cap Freq	1Hz
Output Rise Time Control	10 ⁵ scaling
Input Capacitance	~6fF
Electrometer Input	Yes